



Harness the **power** of nature.

At Seeley, we harness the power of earth and air.

There's a natural attraction between earth and air that is very powerful...

Outside, these forces of nature live all around us. But, what if we could harness this power inside too?

Our gas heating technology has been inspired by nature with ingenious design, incredible reliability and unsurpassed heating performance to create instant, clean, natural, energy efficient heating when and where you want it.

Today, you can harness that power too.

Seeley International is renowned for world-class design and innovation, striking that delicate balance between form and function, just like nature. We have a range of Braemar ducted gas heaters that seamlessly integrate with your home without compromising on comfort, quality or efficiency credentials, delivering efficient, cosy heating for long lasting comfort.

Since day one, over 50 years ago, our company has been about challenging mindsets and stretching the imagination. Trust, reliability and innovation have been the cornerstones to success. It's no coincidence that Seeley International is the most awarded air conditioning manufacturer in Australia, and we export our amazing products all around the globe.

At Seeley International, we don't settle for ordinary, and neither should you.

AM, DUniv Flin, FAICD

Founder and Executive Chairman





Award Winning Company

Seeley International consistently wins awards for new product design, innovation and environmental friendliness. These awards include:







melbourne desigr awards













- 1. 3 to 6 star, and 7 star equivalent products for ducted gas heating.
- 2. Seeley International gas appliances at point of manufacture date will comply with industry safety standards, for use of current regulatory approved hydrogen/natural gas blends at that time

Harness the well timate in warmth and cosy comfort.

Ducted gas heating is the easiest, most comfortable way to heat your entire home. A ducted gas heater is a whole of home solution that allows you to heat the whole house using just one system. It works by taking air from within the house, heating it then distributing through a series of duct work and outlets in the roof.

Benefits of heating with natural gas



Energy efficiency made easy

In Australia, there is an Energy Rating Labelling scheme to help customers choose energy efficient appliances.



Highest star rating

Braemar has developed heaters that measure at a higher efficiency than the maximum 6 star rating stated by the Australian Standard.



More stars, more savings

The higher the number of stars, the more efficient the appliance, meaning greater annual savings on your running costs.



7 Star equivalent4 explained

Using the Australian Standard system, the Australian Gas Association (AGA) report calculates that Braemar has a 7 star equivalent ducted gas heater.



One star = 10% saving³

On average an increase of one star means an average usage saving of approximately 10%.



Independently tested

All Braemar ducted gas heaters have been independently tested in an AGA NATA accredited testing laboratory.

Savings over 1 and 5 years, compared to a 3 star heater³



- 3. Data is based on: Gas price = 2.812 c/MJ House Size 240 m² x 2.4m ceiling height Operation hours per year 600 hrs (100 days at 6 hrs per day) based on AS/NZS5263.1.6:2020 House Heat load 0.2 MJ/h/m³ based on AS/NZS5263.1.6:2020 Annual Energy Consumption (AEC) for different star rated heaters based on AS/NZS5263.1.6:2020 3.0, 4.0, 5.0, 6.0 and 7 star equivalent rated ducted gas heating systems. Note: These figures may vary for individual situations due to variation in factors such as gas price, house size and insulation, heater usage patterns, the area heated, how long you run the heating for, your thermostat settings, your local climate etc.
- 4. Star rating equivalent, Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS/NZS5263.1.6:2020.

Features and benefits



$\begin{array}{ll} \text{Maximum efficiency} \\ \text{with our InShot Burner}^{\text{TM}} \end{array}$

 Thorough air/gas mixing for clean, efficient combustion.




No pilot light ensures the heater works every time

• Electronic ignition guarantees reliable ignition.

• No standing pilot saves wasted gas when heater is not being used.



Ready to perform in a renewable future

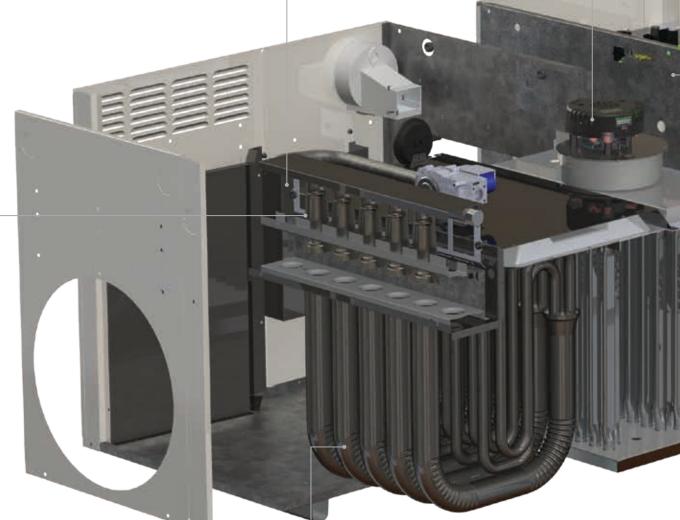



Flexible installation for all types of homes

- Unit can be safely installed inside the roof, under the floor or outside the house⁵.
- Ducts can be installed in the ceiling or under the floor.
- Two-piece configuration means easy installation.



Maximum energy efficiency with Ecostar® Tri-Action™ heat exchanger

- Standard on 6 and 7 star ducted gas heaters.
- Corrosion resistant.
- Maximum heat transfer in minimum space.





Whisper quiet operation with variable speed combustion fan

• Combustion fan effectively expels all combustion gases outside.




Use less energy with heater output modulation

 Our Modulating Gas Control in conjunction with its micro-processor controlled burner, efficiently burns the right amount of gas for any given situation. It can burn from 100% gas rate all the way down to 6% gas rate on our 7 star equivalent⁴ heater range when zoned⁶.



Australian Gas Association (AGA) tested and certified

- Multi level safety controls standard on all of our ducted gas heaters.
- Integrated control system monitors all heater, flame sensor and safety functions.

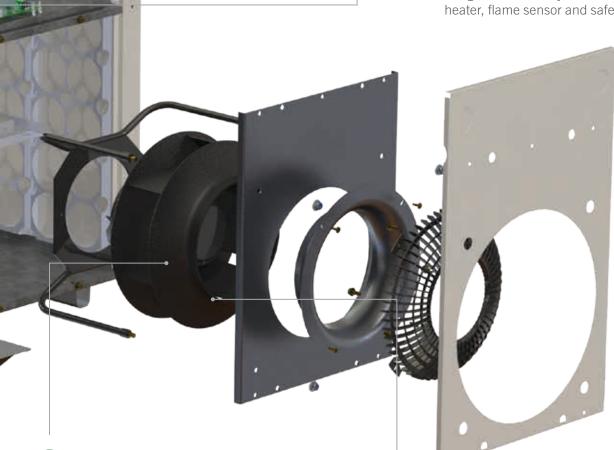



Use less electricity with our inverter motor

- Australia's first and only inverter motor for ducted gas heating, available on the 7 star equivalent⁴ range only.
- Designed to distribute warm air via ducts quickly, effectively and discreetly.
- Save on running costs.

No cold drafts with Stealth® Softair® fan system

- Exclusive to Braemar.
- Delivers continuous warm air.
- 4. Star rating equivalent. Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS/NZS5263.1.6:2020.
- 5. Braemar TQS7 range only suitable for internal installations. ReBuff TQMD5 and TQD3 ranges only suitable for external installations. Any external installations are not to be located on the roof.
- 6. Available on Braemar TQ4, TQM5/6 and TQS7 series ducted gas heaters. Subject to correct heater sizing and duct/zone configuration.



Replacing your old heating system?

Throughout the cooler months, it is **vital for the health of you and your loved ones to have a consistent warm, comfortable environment**. Ducted gas heating offers a reliable, comfortable, instant and constant heat.

If you are undertaking a renovation, or have an older inefficient system, there are many compelling reasons to stay with, or change to, ducted gas heating. Ducted gas heating has advanced considerably in the last 20 years, providing significant efficiency savings and performance improvements. Replacing an old system with a new Braemar ducted gas heating solution can deliver you significant savings on your energy bills.

Replace your old heater and SAVE!

Savings per year compared to an older 1.5 star ducted gas heater³





Note:
Zoning an upgraded
heater can bring further
energy cost savings. Ask
your Braemar Dealer for
further details.



Ducted gas heating vs reverse cycle heating

Ducted gas heating provides many advantages over reverse cycle:

- Ducted gas heating offers an instant, cosy heat with less drying of the air. Reverse cycle air conditioning tends to produce dry air that can irritate the eyes, nose and skin.
- Running cost savings.
- Warms your whole home quickly by producing much warmer air temperatures from your outlets than reverse cycle.
- Most ducted gas heaters are quieter as they are mounted in the roof space, out of sight and without troublesome noise for you or your neighbours.
- Ducted gas heating operates independently of how cold it gets outside and therefore provides constant, cosy performance at all times.
- Whole of home heating with flexible zoning options.
- Natural gas heating produces fewer greenhouse gas emissions than reverse cycle⁷.



Cost effective

Savings of \$365 per year when compared to reverse cycle³.



Better performance

When the outside temperature drops, reverse cycle works less efficiently while ducted gas remains steady.




Instant warmth

Ducted gas reaches desired temperature much faster than reverse cycle.



Comfortable air

Ducted gas heating won't dry your skin and eyes. It's a different kind of cosy warmth.

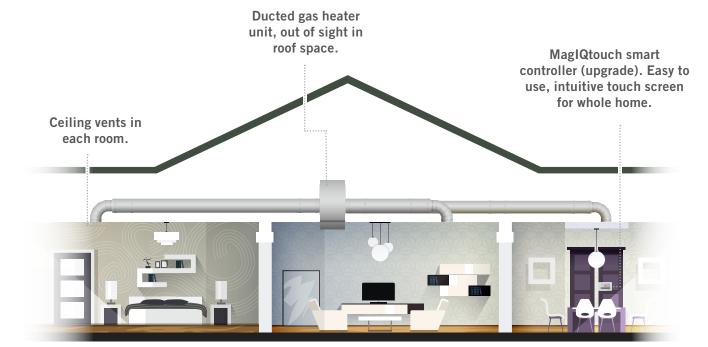

- 3. Data is based on: Gas price = 2.812 c/MJ House Size 240 m² x 2.4m ceiling height Operation hours per year 600 hrs (100 days at 6 hrs per day) based on AS/NZS5263.1.6:2020 House Heat load 0.2 MJ/h/m³ based on AS/NZS5263.1.6:2020 Annual Energy Consumption (AEC) for different star rated heaters based on AS/NZS5263.1.6:2020 3.0, 4.0, 5.0, 6.0 and 7 star equivalent rated ducted gas heating systems Comparison based on 7 star equivalent rated ducted gas heating systems and 1 star ducted reverse cycle air conditioner from publicly sourced data. Note: These figures may vary for individual situations due to variation in factors such as gas price, house size and insulation, heater usage patterns, the area heated, how long you run the heating for, your thermostat settings, your local climate etc.
- $4. \quad \text{Star rating equivalent. Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS/NZS5263.1.6:2020.}\\$
- $7. \quad Data from: \ https://www.australiangasnetworks.com.au/gas-explained/benefits-of-natural-gas/environmental-benefits of the substitution of t$



Ducted gas heating range

7 star equivalent range⁴



Cost effective

Most energy efficient on the market making it cheaper to run compared to reverse cycle.



Inverter motor

Australia's first and only inverter motor for ducted gas heating.



World first

Braemar delivers the world's first 7 star equivalent ducted gas heaters





- Engineered for ultimate efficiency
- Suitable for internal installations
- Zoned-heating capability
- Superior temperature control
- Max heat transfer in minimum space
- Add-On Cooling not available



6 star equivalent range⁴

Ecostar®



6.3 star equivalent

- Zoned-heating capability
- Braemar Add-On Cooling system available for selected models
- Reduced running costs



5 star range

Ecostar® Non-Condensing

5.2 star

- Small cabinet for easier installation
- No drain required
- Zoned-heating capability
- Braemar Add-On Cooling system available for selected models
- Selected models available in propane



^{4.} Star rating equivalent. Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS/NZS5263.1.6:2020





5.2 star

- Pre-fitted with brackets to suit existing supply/return air plenum boxes
- Supplied with a gas inlet pipe to match existing gas supply location
- Zoned-heating capability
- Not available with Add-On Cooling
- Down-discharge air



Renovating or upgrading?

ReBuff™ is designed to replace Brivis Buffalo and other heater models and brands.



4 star range



4.7 star

- Zoned-heating capability
- Braemar Add-On Cooling system available for selected models



3 star range

Ecostar®



3.7 star

- Minimum efficiency
- Zoning and Add-On Cooling not available





ReBuff[™]



3.7 star

- Pre-fitted with brackets to suit existing supply return air plenum boxes
- Supplied with a gas inlet pipe to match existing gas supply location
- Add-On Cooling not available
- Down-discharge air



Renovating or upgrading?

ReBuff™ is designed to replace Brivis Buffalo and other heater models and brands.





Gas wall furnaces



Cost savings

Leading-edge technology ensures maximised energy efficiency and savings in running costs.



Over 80 year history of quality and reliability



Efficiency

Super-efficient and economical heating with 4.5 / 4.2 star ratings.



Have it your way

Stylish design with flexible installation options.



Safety

No emissions inside with ultra-safe flued heating.



Environment


Lower CO₂ emissions⁸.


Braemar wall furnaces are ideal for replacing existing wall furnaces, including the following brands and models:

Model being replaced	Flue extension kit 080802 (PWF30/40)
Braemar D11/12	Kit not required
Braemar D45/55	Kit not required
Vulcan Series 20/22	Kit not required
Vulcan Quasar	Yes
Pyrox Deluxe	Yes
Convair Finesse	Yes

Flexible installation options







		I			
Install location	External wall	Internal wall	Internal wall		
Install type	Inbuilt/Console	Inbuilt/Console	Inbuilt/Console		
Flue type	Vertical flue	Vertical flue	Vertical flue		
Rear register	N/A	No	Yes		

Option to heat two rooms

Installing your wall furnace on an internal wall? An optional rear register kit means an adjoining room can also be heated. Available on selected PWF installations.



Renovating or upgrading?

Ecostar is designed to replace existing wall furnaces for either Braemar models or other branded models.

8. Data from: https://www.australiangasnetworks.com.au/gas-explained/benefits-of-natural-gas/environmental-benefits

Power flue wall furnaces

Ideal for heating the living area or entertainment spaces of your home, the Braemar Ecostar Power Flue Wall Furnaces deliver comfort and warmth throughout the cooler months. A great replacement for existing wall furnaces, with an energy efficiency of up to 4.5 stars.

The PWF utilises a powered flue system - safely expelling combustion emissions outside, leaving you in cosy warm comfort inside.

Ecostar Power Flue PWF30

The PWF30 is a functional and stylish replacement for existing wall furnaces and is able to heat up to **95m²**.

Ecostar Power Flue PWF40

(Commercial applications only)

The PWF40 will heat an approximate area of **80 - 120m²** and is recommended for light commercial or very large domestic applications such as halls and large rumpus rooms. It is not suitable for smaller domestic applications due to the higher heat and air flow rates.



Features

- Overheat safety switches
- Thermostatic temperature control
- Self diagnostic control system
- Cool-to-touch cabinet
- Pre-heat function
- Stealth® Softair® function
- Child lock
- Flexible install options

- PWF30 natural gas and propane
- PWF40 natural gas only
- Electronic ignition
- Electronic flame sensing
- Power flue system
- Dual gas rate
- Boost setting for rapid heating







Harness the **Simplicity** of **MAGIQTOUCH**® controller

Touch screen technology

Smart, sophisticated and incredibly intuitive, your MaglQtouch controller is an upgrade from the Braemar manual controller and makes operating your Braemar ducted gas heating system so simple. Control the temperature, fan speed and many more features on a user-friendly touch screen.



Main features



Touch screen functionality

All functions and operations are only a touch away with the easily navigated interface.



Zone your home

Switch between zones in your home and control the heating settings in each zone.

Save on running costs by switching zones off⁹.



Stylish design

Sleek screen styling to fit in to any home décor.



Program mode

Programmable 7 day, 4 time period program, customisable to suit your lifestyle (including a temporary over-ride function).



Useful settings

Access features such as child lock, quiet mode¹⁰ and servicing information.



Switch to cooling

Quickly switch to cooling if Braemar Add-On Cooling is available to complement your ducted gas heating system.

Manual controller

The Braemar manual controller is simple and easy to use, controlling heating only, with a large, easy to read digital display. Zoning and timer functionality not available with this controller.



- 9. Zoning is an optional extra. Heating in each zone is subject to having air sensors or additional MaglQtouch controllers.
- 10. TQ3 and TQD3 models: night quiet mode and zoning is not available, and fan speed is not user-adjustable.

Harness the **power** of Wi-Fi and wireless

Controller upgrade options

If you choose a MaglQtouch controller you receive a touch screen that is hard-wired into your home, fixed to your wall, where it best suits your needs. This model of MaglQtouch controller can be upgraded to a Wi-Fi enabled touch screen.



Wi-Fi enabled¹¹ touch screen:

 Take complete control of your comfort at home, at all times.

 Upgrade to a Wi-Fi module (sold separately) to work with your hard-wired MaglQtouch Controller¹² enabling you to control your heating directly from your personal device through our smart app.

 The Smart app¹¹ is available on Android and IOS devices. Control your heating from ANYWHERE







Available for download now on iOS and Android

Option 2

Unable to have a hard-wired controller? No problem. MagIQtouch also has a wireless touch screen option.



Wireless touch screen:

- Battery operated Wireless Controller using Radio Frequency technology.
- Ideal for renovations, or where access for cabling is limited.
- Easier to install, the RF option can operate with up to 2 primary controllers.
- Can control the entire system from 2 locations, rather than 1; an ideal solution for larger, or two storey homes.
- Not compatible with Wi-Fi module.



- 11. Requires MaglQtouch wall control, MaglQtouch Wi-Fi smart kit and MaglQtouch account to operate. Additional costs may apply.
- 12. MagIQtouch Wi-Fi Module is not compatible with MagIQtouch wireless controller. Existing installations including a MagIQtouch controller may need to be upgraded if purchasing the Wi-Fi module. Additional costs may apply.

Zone your home¹³

Zoning your home's new ducted gas heating system can deliver **up to 60% more savings**¹⁴ on top of your star rating choice when you select the gas heater unit. Heating only selected rooms or zones in your home when you want to, means you aren't paying for heating certain areas of your home unnecessarily.

Standard zoning

Controlled from:

1 x MagIQtouch controller

- Set one temperature for all zones
- Ability to turn zones on and off, based on minimum outlet requirement



Central control zoning

Controlled from:

1 x MaglQtouch controller

- Set different temperatures for each zone
- Additional discreet MaglQtouch Air Sensors located in each zone
- Ability to turn zones on and off, based on minimum outlet requirement
- Option for up to 10 different zones






Complete comfort zoning

Controlled from:

Up to 10 x MagIQtouch controllers

(1 x per zone)

- Set **different temperatures** for each zone from a dedicated MaglQtouch controller in each zone based on minimum outlet requirement
- MagIQtouch zone controllers include built-in temperature sensors
- Ability to switch on/off whole system from a central master MaglQtouch controller
- Option for up to 10 different zones

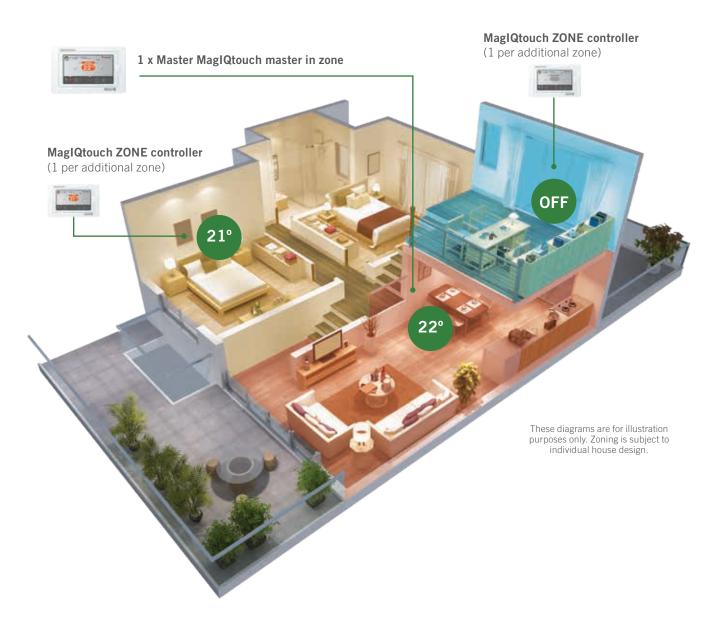

- 13. Zoning is an optional extra cost. TQ3 and TQD3 models: zoning is not available.
- 14. Zoning savings are based on: A range of assumed zone configurations, usage profiles and zone set-temperatures, with energy consumption reduced due to not heating the whole house all of the time. Individual zone temperature control (a single MaglQtouch controller in combination with air temperature sensors, or multiple MaglQtouch controllers). Actual savings achieved will depend on a number of varying factors.



Technical specifications

7 star equivalent ⁴	Model	Series	Stars	Gas rate (MJ/h)	Airflow @ 100 Pa (I/s)	Output (kW)	Length (mm)	Width (mm)	Height (mm)	Duct dia (mm)	Gas type	
7 st uiva	TQS730 ⁴	Ecostar	7.0	100	700	26.6	1165	510	660	350	NG	
6 star equivalent ⁴	Model	Series	Stars	Gas rate (MJ/h)	Airflow @ 100 Pa (I/s)	Output (kW)	Length (mm)	Width (mm)	Height (mm)	Duct dia (mm)	Gas type	
6 star uivalen	TQM618	Ecostar	6.3	70	500	17.9	1150	385	660	300	NG	
nbə	TQM623	Ecostar	6.3	88	640	22.5	1150	385	660	300	NG	
	TQM6X23 ¹⁵	Ecostar	6.3	88	755	22.5	1150	385	660	350	NG	
	TQM632	Ecostar	6.3	122	935	31.2	1165	510	660	350	NG	
	TQM6X32 ¹⁵	Ecostar	6.3	122	1070	31.2	1165	510	660	400	NG	
ä	Model	Series	Stars	Gas rate (MJ/h)	Airflow @ 100 Pa (I/s)	Output (kW)	Length (mm)	Width (mm)	Height (mm)	Duct dia (mm)	Gas type	
5 star	TQM516	Ecostar	5.2	70	475	15.9	770	385	660	300	NG	
	TQM520	Ecostar	5.2	88	630	20.0	770	385	660	300	NG	
	TQM5X20 ¹⁵	Ecostar	5.2	88	695	20.0	770	385	660	350	NG	ğ
	TQM5X20U ¹⁵	Ecostar	5.2	88	695	20.0	770	385	660	350	Propane	Non condensing
	TQM530	Ecostar	5.2	122	960	27.8	880	510	660	350	NG	pude
	TQM5X30 ¹⁵	Ecostar	5.2	122	1050	27.8	880	510	660	400	NG	n C
	TQM5X30U ¹⁵	Ecostar	5.2	122	1050	27.8	880	510	660	400	Propane	S
vn arge	TQMD520 ¹⁶	ReBuff	5.2	88	490	20.0	770	385	635	n/a	NG	
Down discharge	TQMD530 ¹⁷	ReBuff	5.2	122	880	27.8	880	510	650	n/a	NG	
	Model	Series	Stars	Gas rate (MJ/h)	Airflow @ 100 Pa (I/s)	Output (kW)	Length (mm)	Width (mm)	Height (mm)	Duct dia (mm)	Gas type	
4 star	TQ415	Ecostar	4.7	60	475	14.0	770	385	660	300	NG	
	TQ420	Ecostar	4.7	80	630	18.0	770	385	660	300	NG	
	TQ4X20 ¹⁵	Ecostar	4.7	80	695	18.0	770	385	660	350	NG	
	TQ425	Госовои					770	205	660	350	NG	
		Ecostar	4.7	100	755	23.0	770	385	000	330		
	TQ4X25 ¹⁵	Ecostar	4.7	100	755 810	23.0	770	385	660	350	NG	
	TQ430			100 122			770 880					
	TQ430 TQ4X30 ¹⁵	Ecostar	4.7 4.7 4.7	100 122 122	810 960 1050	23.0 28.0 28.0	770 880 880	385 510 510	660 660 660	350 350 400	NG NG NG	
	TQ430	Ecostar Ecostar	4.7 4.7	100 122	810 960	23.0 28.0	770 880	385 510	660 660	350 350	NG NG	
	TQ430 TQ4X30 ¹⁵	Ecostar Ecostar Ecostar	4.7 4.7 4.7	100 122 122	810 960 1050	23.0 28.0 28.0	770 880 880	385 510 510	660 660 660	350 350 400	NG NG NG	
	TQ430 TQ4X30 ¹⁵ TQ435	Ecostar Ecostar Ecostar Ecostar	4.7 4.7 4.7 4.7	100 122 122 140	810 960 1050 1050	23.0 28.0 28.0 32.0	770 880 880 880	385 510 510 510	660 660 660	350 350 400 400	NG NG NG	
	TQ430 TQ4X30 ¹⁵ TQ435 CQS415	Ecostar Ecostar Ecostar Ecostar Compact	4.7 4.7 4.7 4.7 4.0	100 122 122 140 60	810 960 1050 1050 430	23.0 28.0 28.0 32.0 14.0	770 880 880 880 1065	385 510 510 510 375	660 660 660 660 460	350 350 400 400 300	NG NG NG NG	
ar	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420	Ecostar Ecostar Ecostar Ecostar Compact Compact	4.7 4.7 4.7 4.7 4.0 4.4	100 122 122 140 60 90	810 960 1050 1050 430 600	23.0 28.0 28.0 32.0 14.0 20.5	770 880 880 880 1065	385 510 510 510 375 375	660 660 660 660 460	350 350 400 400 300 300	NG NG NG NG NG	
3 star	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420 CQS430	Ecostar Ecostar Ecostar Ecostar Compact Compact	4.7 4.7 4.7 4.7 4.0 4.4 4.4	100 122 122 140 60 90 120	810 960 1050 1050 430 600 950	23.0 28.0 28.0 32.0 14.0 20.5 27.5	770 880 880 880 1065 1065 1110	385 510 510 510 375 375 470 Width	660 660 660 660 460 460 460 Height	350 350 400 400 300 300 350 Duct dia	NG NG NG NG NG NG	
3 star	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420 CQS430 Model	Ecostar Ecostar Ecostar Ecostar Compact Compact Compact Series	4.7 4.7 4.7 4.7 4.0 4.4 4.4 Stars	100 122 122 140 60 90 120 Gas rate (MJ/h)	810 960 1050 1050 430 600 950 Airflow @ 100 Pa (I/s)	23.0 28.0 28.0 32.0 14.0 20.5 27.5 Output (kW)	770 880 880 880 1065 1065 1110	385 510 510 510 375 375 470 Width (mm)	660 660 660 660 460 460 460 Height (mm)	350 350 400 400 300 300 350 Duct dia	NG NG NG NG NG NG NG Gas type	
3 star	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420 CQS430 Model TQ315	Ecostar Ecostar Ecostar Ecostar Compact Compact Compact Series Ecostar	4.7 4.7 4.7 4.0 4.4 4.4 Stars 3.7	100 122 122 140 60 90 120 Gas rate (MJ/h)	810 960 1050 1050 430 600 950 Airflow @ 100 Pa (l/s) 475	23.0 28.0 28.0 32.0 14.0 20.5 27.5 Output (kW) 14.0	770 880 880 880 1065 1065 1110 Length (mm) 770	385 510 510 510 375 375 470 Width (mm) 385	660 660 660 460 460 460 Height (mm) 660	350 350 400 400 300 300 350 Duct dia (mm) 300	NG NG NG NG NG NG NG NG NG	
3 star	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420 CQS430 Model TQ315 TQ320	Ecostar Ecostar Ecostar Ecostar Compact Compact Compact Series Ecostar	4.7 4.7 4.7 4.7 4.0 4.4 4.4 Stars 3.7 3.7	100 122 122 140 60 90 120 Gas rate (MJ/h) 60 80	810 960 1050 1050 430 600 950 Airflow @ 100 Pa (l/s) 475 630	23.0 28.0 28.0 32.0 14.0 20.5 27.5 Output (kW) 14.0 18.0	770 880 880 880 1065 1110 Length (mm) 770	385 510 510 510 375 375 470 Width (mm) 385 385	660 660 660 460 460 460 460 Height (mm) 660	350 350 400 400 300 300 350 Duct dia (mm) 300 300	NG	
	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420 CQS430 Model TQ315 TQ320 TQ325	Ecostar Ecostar Ecostar Compact Compact Compact Series Ecostar Ecostar Ecostar	4.7 4.7 4.7 4.0 4.4 4.4 Stars 3.7 3.7	100 122 122 140 60 90 120 Gas rate (MJ/h) 60 80 100	810 960 1050 1050 430 600 950 Airflow @ 100 Pa (l/s) 475 630 755	23.0 28.0 28.0 32.0 14.0 20.5 27.5 Output (kW) 14.0 18.0 23.0	770 880 880 880 1065 1065 1110 Length (mm) 770 770 770	385 510 510 510 375 375 470 Width (mm) 385 385 385	660 660 660 460 460 460 Height (mm) 660 660	350 350 400 400 300 350 Duct dia (mm) 300 300 350	NG	
Down 3 star discharge	TQ430 TQ4X30 ¹⁵ TQ435 CQS415 CQS420 CQS430 Model TQ315 TQ320 TQ325 TQ330	Ecostar Ecostar Ecostar Ecostar Compact Compact Compact Ecostar Ecostar Ecostar Ecostar Ecostar	4.7 4.7 4.7 4.0 4.4 4.4 Stars 3.7 3.7 3.7	100 122 122 140 60 90 120 Gas rate (MJ/h) 60 80 100 122	810 960 1050 1050 430 600 950 Airflow @ 100 Pa (I/s) 475 630 755 960	23.0 28.0 28.0 32.0 14.0 20.5 27.5 Output (kW) 14.0 18.0 23.0 28.0	770 880 880 880 1065 1065 1110 Length (mm) 770 770 770 880	385 510 510 510 375 375 470 Width (mm) 385 385 385 510	660 660 660 460 460 460 Height (mm) 660 660 660	350 350 400 400 300 350 Duct dia (mm) 300 350 350	NG N	

Ş	Model Dimen Height Width	Dimensions (mm)			Star	Gas input (MJ/hr)				ea that can neated (m²)18		Castona	
Furnaces		Width	Depth (inbuilt)	Depth (console)	rating	Low	High	kW	Cold	Cool	Mild	Gas type	
굔	Ecostar PWF30N	2050	498	167	260	4.5	20	28	6.4	65	85	95	NG
Wall	Ecostar PWF30P	2050	498	167	260	4.5	18	28	6.4	65	85	95	Propane
	Ecostar PWF40N	2050	498	167	260	4.2	25	38	8.6	80	100	120	NG

- 4. Star rating equivalent. Based on Australian Gas Association's results calculated in accordance with the testing methodology in AS/NZS5263.1.6:2020
- 15. Extra air models are designed to have Braemar add-on cooling system added.
- 16. Mounting frame dimensions to fit existing supply/return air plenum box: 770mm(W) x 395mm(D). Models suitable for external installation only.
- $17. \ \ Mounting frame dimensions to fit existing supply/return air plenum box: 880mm(W) \ x \ 565mm(D).$
- 18. Area that can be heated is an indication only and is based on brick veneer construction, insulated walls and ceilings, 2.4m ceiling height and suitable window coverings. Precise heating capacity calculation should be undertaken to determine the correct unit required for your specific application.

Renewable, clean, green hydrogen... The future of home heating.

Australians love natural gas. Almost half of all household energy in Australia is provided by gas¹⁹. It's a reliable, cost-effective energy for the appliances we use for cooking, heating and hot water. The great news is there are changes afoot with plans to rollout green hydrogen into the supply chain to households.

When used as a fuel, hydrogen's only by-product is water. This flexible, safe and storable fuel can be used to blend with or replace natural gas to heat homes and for cooking. It produces no carbon emissions when used as a fuel.

Hydrogen is also hugely versatile and has many other uses in industry and transport, all of which will bring us closer to a net zero emissions future, right here in Australia.

What's exciting is that hydrogen blended with natural gas is the first step to this zero emissions future in Australia and it is currently being trialed in selected communities across Australia by leading gas suppliers. Importantly it will be rolled out into various gas networks within the next 5 to 10 years.

At Seeley International, we have been working with leading industry authorities to ensure our gas heating products are "hydrogen-ready", to perform at their best using hydrogen blends to provide the same cosy warmth and whole of home comfort that millions of Australians expect and have been experiencing every winter with Braemar, for generations.

So, when clean and green, renewable hydrogen gas blends are available in your neighbourhood in the near future, you can be assured that your Braemar gas heating system will perform at its best and is compliant with all Australian Safety Standards and regulations².

- 2. Seeley International gas appliances at point of manufacture date will comply with industry safety standards, for use of current regulatory approved hydrogen/natural gas blends at that time.
- 19. Source: https://renewable-gas.com.au 2022



Australian designed, made and owned!



Built by Australians, for the harsh Australian climate

Seeley International is proudly a 100% Australian owned company, designing and manufacturing world-leading air conditioning products for Australia and the world. As Australia's largest air conditioning manufacturer, we are a global leader in developing ingenious, energy-efficient cooling and heating products. Being made in Australia, you can rely on build quality, longevity and the availability of parts and after sales service, for many years to come. We're extremely passionate, and dedicated to strengthening the Australian economy, supporting local employment and building on the skills of our workforce.



Braemar ducted gas heating units are Australian made, using premium grade materials and supported by a comprehensive factory-backed warranty. While our engineering and quality control procedures mean we don't think you'll ever need to use it, our warranty is there for your protection and peace of mind.

Service requirements to maximise your warranty:



Standard maintenance service as per owners manual



Register your warranty online

4th year general maintenance ser

maintenance service, performed, and charged for, by Seeley International or its nominated appointee



Standard maintenance service as per owners manual



The 7 year comprehensive warranty is available only if the product is first purchased from Seeley International, by Seeley International Participating Dealers and not through distributors/wholesalers or trade installers.

Warranty is calculated at 7 years from date of purchase.

The warranty has terms and conditions, including the requirement for regular servicing of the product in accordance with the owner's manual.

Wall furnaces

Braemar wall furnaces are backed by a 2 year warranty, and 10 year heat exchanger warranty.







IMPORTANT

Remember to always use qualified, licensed installers who have been trained to install Braemar products. While Seeley International stands by its product quality, a poorly installed product may not operate properly and can even be dangerous. So be sure to buy your product from a reputable dealer (visit seeleyinternational.com to find a dealer) and make sure your installer is fully qualified and trained.

20. The 7 year comprehensive warranty is available exclusively (i.e. only) if the product is purchased from Seeley International participating dealers. If it is not, then the warranty period, when the product is used for personal, residential household purposes, is 5 years. In commercial applications (when the product is used for keeping people warm), the warranty period is 5 years, and it is 1 year for non-domestic heating applications. The warranty has terms and conditions, including the requirement for regular servicing of the product in accordance with the owner's manual. In the fourth year the service must be performed by Seeley International or its appointed nominee.





Harness the **power** of nature

















BREEZAIR

Ducted Evaporative Air Conditioning

BRAEMAR

Ducted Evaporative Air Conditioning | Ducted Gas Heating Reverse Cycle Air Conditioning | Hybrid Heating System | Gas Wall Furnaces

THE CLIMATE WIZARD

Micro-Core® Technology

SUPERCOOL

Ducted Evaporative Air Conditioning

COOLAIR

Ducted Evaporative Air Conditioning

COOLERADO

Indirect Evaporative Air Conditioning

AIRA

Direct and Indirect Evaporative Air Conditioning | Ducted Gas Heating Commercial Gas Space Heating

INTEGRATED COMFORT INCORPORATED (ICI)

Dual Cool® Patented Dual Evaporative pre-cooling products

seeleyinternational.com

1300 360 815

Seeley International Pty Ltd

ABN 23 054 687 035

112 O'Sullivan Beach Road, Lonsdale, SA 5160

Phone: (08) 8328 3850 seeleyinternational.com

Information in this brochure was correct at the time of preparation. E & OE



With the generous support of our Australasian dealers we are proud to be the National Variety Bash partner supporting kids in need across Australia.



Cat No CMSI014 REV G (0325)