

The Climate Wizard
By **SEELEY** INTERNATIONAL ™

Indirect Evaporative
HVAC Solutions



World leading climate control solutions

Built by Australians, for an Australian climate. Seeley International is proudly a 100% Australian owned company, designing and manufacturing world-leading commercial air conditioning solutions for Australia and the world. As Australia's largest air conditioning manufacturer, we are a global leader in developing ingenious, energy-efficient cooling and heating products.

Being made in Australia, you can rely on consistency of supply, build quality, availability of parts and after sales service. We're dedicated to strengthening the Australian economy, supporting local employment and building on the skills of our workforce.



Australian designed, made and owned!



AIRA

By SEELEY INTERNATIONAL
Commercial evaporative air conditioners, heaters & HCV

The Climate Wizard

By SEELEY INTERNATIONAL
Hyper-efficient indirect evaporative air conditioners

Braemar
By SEELEY INTERNATIONAL

Refrigerated air conditioning range including VRF (heat pump and heat recovery) industrial & commercial evaporative air conditioners

Award Winning Company

Seeley International consistently wins awards each year for new product design, innovation and the environment.





About The Climate Wizard

The Climate Wizard's unique indirect evaporative heat exchange core provides hyper-efficient cooling of outside air.

Generate **100% fresh, cool, outside air**, at temperatures that rival refrigerated systems, with up to **80% lower energy costs***.

Reduce carbon emissions Low GWP



- Reduced running costs by up to 80%*
- Reduce the energy use and improve the cooling performance of existing refrigerated systems
- No high electrical demand charges even in hot weather
- Savings on the installation costs

Comfortable indoor air quality



- Temperatures are similar to those produced by refrigerated systems
- Improved IAQ (indoor air quality) with 100% outside air
- No moisture added to the air**
- Total cooling performance increases when air temperature rises

Flexible applications



- Flexible design and engineering configurations
- Ideal for use as a DOAS (dedicated outdoor air system), data centres cooling or for comfort cooling applications
- Covers an exceptionally large range of flexible configurations in a wide range of industries
- Supported by a team of experienced design consultants and engineers

Supporting Sustainability



- Wiser use of water (R-718)
- Responsible use of renewable resources
- No synthetic refrigerants or chemicals
- Features an Auto-Cleanse™ to minimise water consumption and to maintain quality

Hyper-efficient



- Simple, reliable solution to improve COP / EER (coefficient of performance / energy efficiency ratio)
- Meets various regulatory requirements
- Tested in NATA (National Association of Testing Authorities) accredited laboratory#

Low maintenance with technical support



- Australian designed, made and owned
- Easy access to spare parts
- National service network
- After sales support

*Compared to refrigerated systems performing the same duty

** The Climate Wizard Supercool (indirect/direct option) adds a small amount of moisture to the supply air

#Testing of the CW-80 units in the NATA accredited Meridian Test Laboratory is not possible due to their large and unique size.

Standard product range

The Climate Wizard

Indirect evaporative air conditioning

Dramatically reduces energy consumption and cooling costs compared to equivalent refrigerated systems



CW-H15

UP TO 25kW

- COP of up to 14
- Up to 25 kW of cooling capacity in outside air pre cooling applications
- Up to 1,100 L/s (3,960 m³/h) supply air

- External Static Pressure improvements of up to 150 Pa.
- Powder coated, marine grade aluminium
- Variable speed ECM (electronically commutated motor) for maximum energy efficiency



CW-80

UP TO 180kW

- COP of up to 13
- Up to 180 kW of cooling capacity in outside air pre-cooling applications
- Up to 8,500 L/s (30,600 m³/h) supply air

Enhanced CW-80 range

ENHANCED CW-80 RANGE

- External Static Pressure improvements of up to 820 Pa
- Compatible with Multi-Magic[®] control system
- Reduced unit size and weight
- Redesigned front for greater flexibility in duct configuration options

The Climate Wizard Supercool

Indirect evaporative cooling with direct evaporative stage

Designed to maintain precise temperature and humidity levels – at very low operating costs



CW-H15S Plus

UP TO 40kW

- COP of up to 18
- Up to 40 kW of cooling capacity in outside air pre-cooling applications
- Up to 1,600 L/s (5,760 m³/h) supply air

CW-H15S



UP TO 28kW

- COP of up to 16
- Up to 28 kW of cooling capacity in outside air pre-cooling applications
- Up to 1,100 L/s (3,960 m³/h) supply air

Discover how CW-H15S is the ideal solution for winery barrel halls at seeleyinternational.com/winemaker



CW-6S

UP TO 13kW

- COP of up to 20
- Up to 13 kW of cooling capacity in stand alone cooling applications
- Up to 1,300 L/s (4,680 m³/h) supply air



CW-80S

UP TO 214kW

- COP of up to 15
- Up to 214 kW of cooling capacity in outside air pre-cooling applications
- Up to 8,200 L/s (29,500 m³/h) supply air

Enhanced CW-80 range

How it works

The Climate Wizard indirect evaporative air conditioners use a hyper-efficient counter-flow heat exchanger to produce 100% fresh, cool, outside air, with no added moisture.

The fresh cold air produced by The Climate Wizard can be similar to that produced by refrigerated systems, with temperatures that approach the ambient dew-point temperature.

1. Hot air enters the cooler

- Hot outside air enters the cooler via the inlet.
- A powerful, energy-efficient, electric fan moves the air towards the core.

2. Hot air passes through the core

- The core is an air-to-air heat exchanger consisting of alternating dry and wet channels.
- All of the air passes along the dry channels and gains no additional moisture.

3. Warm, moist air exhausted outside


- As the air exits the dry channels, a portion of the conditioned air is returned through the wet channels.
- Through evaporation and conduction, it gains both moisture and heat. The channels are continuously soaked with water. This moist, warm air is then exhausted outside of the building.

- No moisture is transferred across the membranes between the dry and wet channels; only temperature (heat) is transferred.
- The heat passes out of the air in the dry channels through the membrane and into the air passing through the wet channels.
- In this way, the air in the dry channels becomes progressively colder but gains no moisture.

4. Fresh, cool outside air passes into the building

- The air passing along the dry channels in the core is cooled, with no moisture added.
- This fresh, cool air passes into the building.

The Climate Wizard counter-flow heat exchanger

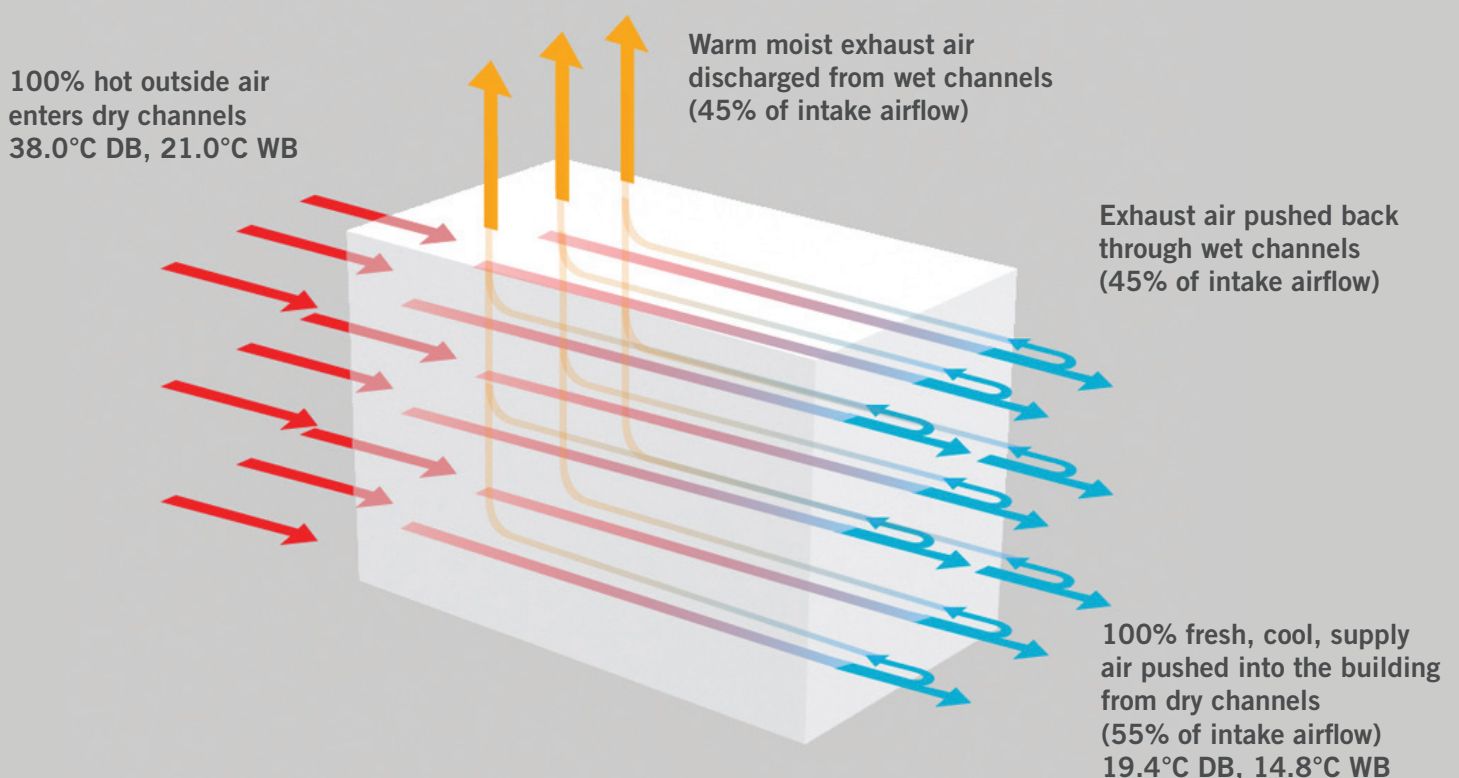


Diverse configurations and applications

Dramatically reduce energy consumption and cooling costs by incorporating The Climate Wizard with other HVAC systems.


Stand-alone cooling

Ideal for open plan and outdoor access applications

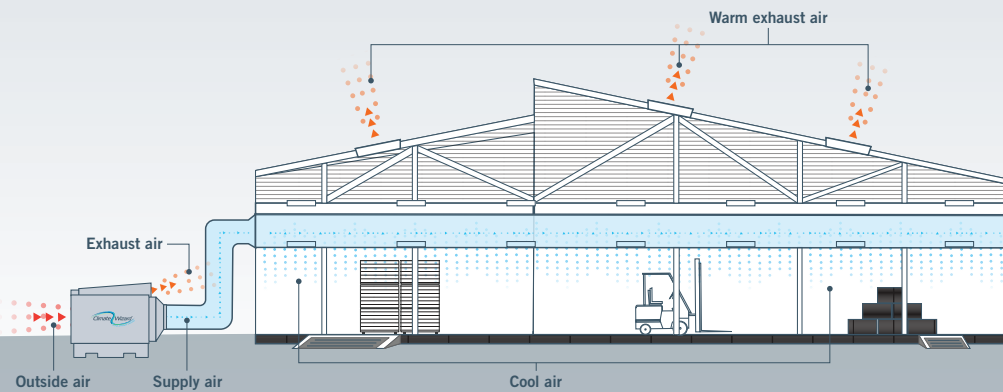


Pre-cooling

A super cost effective way of cooling outside air required by refrigerated systems

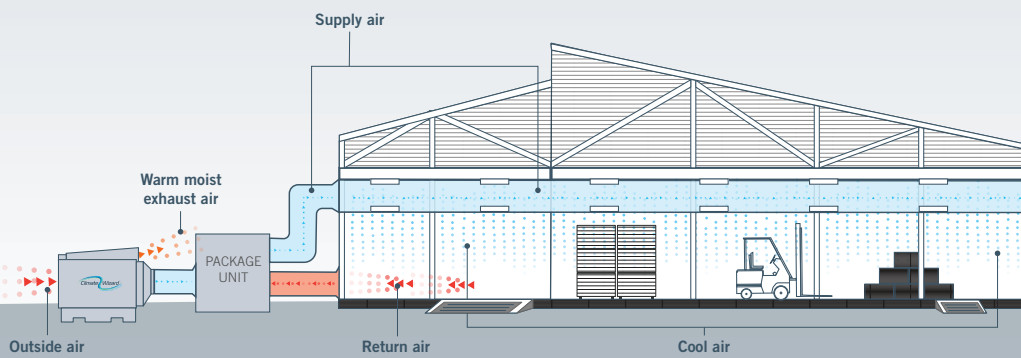

Hybrid heating and cooling

Ensure full design heating and cooling capacity by combining The Climate Wizard with other HVAC equipment such as commercial heating and/or VRF

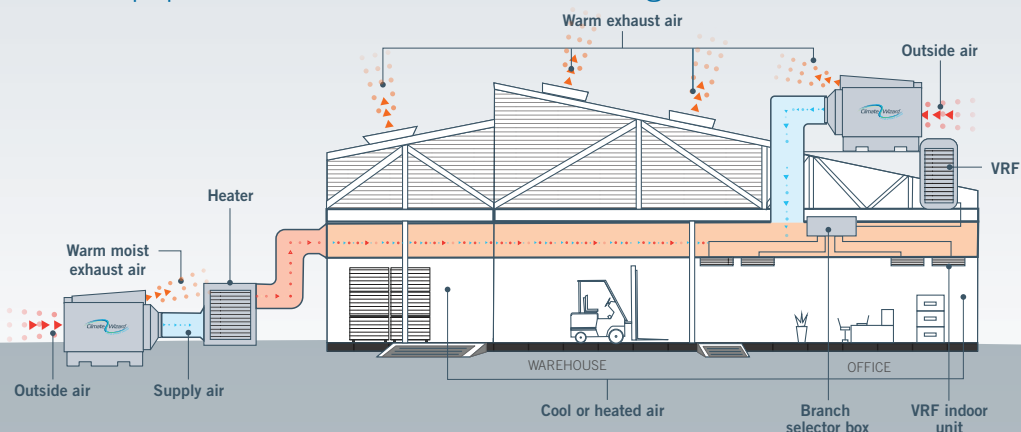

Multi-Magic® Control System

Seeley International has delivered, in collaboration with Schneider Electric, a new standard in climate control for its hyper-efficient commercial cooling range, The Climate Wizard.

Providing Smart connectivity, Multi-Magic® delivers state-of-the-art control for optimising performance, energy-efficiency and operational savings, as well as easy installation with an intuitive user interface.



Control System Benefits and Accessories

- Connect up to 15 devices via MODBUS RS-485.
- Ability to manually control the units in a fixed mode of operation.
- Comprehensive fault feedback to assist with servicing and troubleshooting.
- Utilise an optional mobile gateway to access the system remotely. Operational status and performance is logged and uploaded to the cloud for historical graphing and fault reporting.
- BMS Interface
 - Low level interface to control mode of operation and fan speed.
 - High level Modbus interface to control and read detailed operational status of the equipment.
- Advanced Features:
 - Advanced automatic control algorithms that maximise energy efficiency of the cooling equipment.
 - Programmable 7-day timer to automatically control on/off times and mode of operation.
 - Ambient Condition Monitoring utilises ambient temperature and humidity sensors to predict leaving air temperature of the cooler allowing the controller to maintain stable room conditions.
 - Minimum and maximum fan speed settings to ensure minimum outside air ventilation requirements are met.
 - Supplementary fan and damper delay interface allows users to interface with ancillary equipment.

Controller and Accessories



Multi-Magic® Wall Controller

- 4" colour touch screen display with temperature and humidity sensor.
- Manual IEC, supercool and fan speed control.
- 7 day programmable timer, 4 events per day.
- Service screen with operational history for ease of troubleshooting and servicing.
- Operate up to 15 coolers from one control.



Room Sensor



Ambient Sensor



Duct Sensor

Multi-Magic® Optional Sensors

- Remote **room and humidity sensors** allow for averaging over a large area and allows for placement of the wall controller in a secure location not within the conditioned space.
- An **IP65 ambient sensor** complete with radiation shield provides the ability to utilise the Ambient Conditioning Monitoring advanced feature for stable room conditions.
- Ambient Condition Monitoring mode uses advanced formulas to calculate a predicted supply temperature. Coolers are disabled if the predicted supply temperature is greater than the current room temperature.
- **Duct mounted sensor** provides a read out on the screen to monitor performance of the cooler.
- When used in conjunction with Multi-Magic®, the room sensors allow the wall controller to be located safely away from the conditioned space. Wall Controller sensor values are disabled, and only the Room Sensor is used for setpoint control. Multiple Room Sensor values from multiple coolers can be averaged together to provide an overall temperature and relative humidity value for larger spaces.

Design and performance features CW-H15 Series

Indirect heat exchange core

- Patented The Climate Wizard counter-flow heat exchanger
- Uses indirect evaporative cooling to keep added moisture separate from the supply air stream
- Designed for long service life and consistent performance
- Provides maximum efficiency

Supply air pressure damper*

- Regulates air pressure in the discharge plenum
- Used to control exhaust flow in the wet channels
- Provides simple, positive capacity control

*Applicable on CW-H15 models only.

Tornado® circulation water pump

- Australian designed and manufactured
- Exceptional reliability under all conditions
- Includes 'clever impact start' feature that will overcome any tendency for the pump to become locked up with residue during prolonged off periods
- The strong synchronous motor has constant speed, independent of voltage fluctuations, and runs very cool for long life



Water reservoir

- One piece moulded polymer construction
- Durable and corrosion free
- Provides excellent sound deadening properties
- Sloped to prevent standing water when drained

Drip tray

- Part of the independent water collection system for the direct evaporative section
- Corrosion free and self-draining

Water management system

- Custom designed water management system minimises water consumption and maximises cleanliness
- Continuously monitors and controls the water salinity level in the reservoir
- Controls water cleanliness using a factory installed electro-chlorinator
- Alarms if low water levels are detected
- Manages water distribution for minimum water consumption and maximum cooling efficiency
- Automatic drain valve - controlled to manage water quality and maximise system efficiency
- Drains the water system during prolonged idle periods




Supply air fan and electric motor


- Backward curved, direct drive, plug fan
- Ultra-quiet, vibration free
- Variable speed ECM (electronically commutated motor) for maximum energy efficiency



Water distributor

- The water distributor delivers a calibrated volume of water to efficiently supercool the unit's leaving air
- A dedicated pump and water distributor are used to independently water the direct evaporative media to maximise versatility
- The system uses tried and true technology, developed over many years by Seeley International
- Designed to prevent clogging and evenly water the direct evaporative media

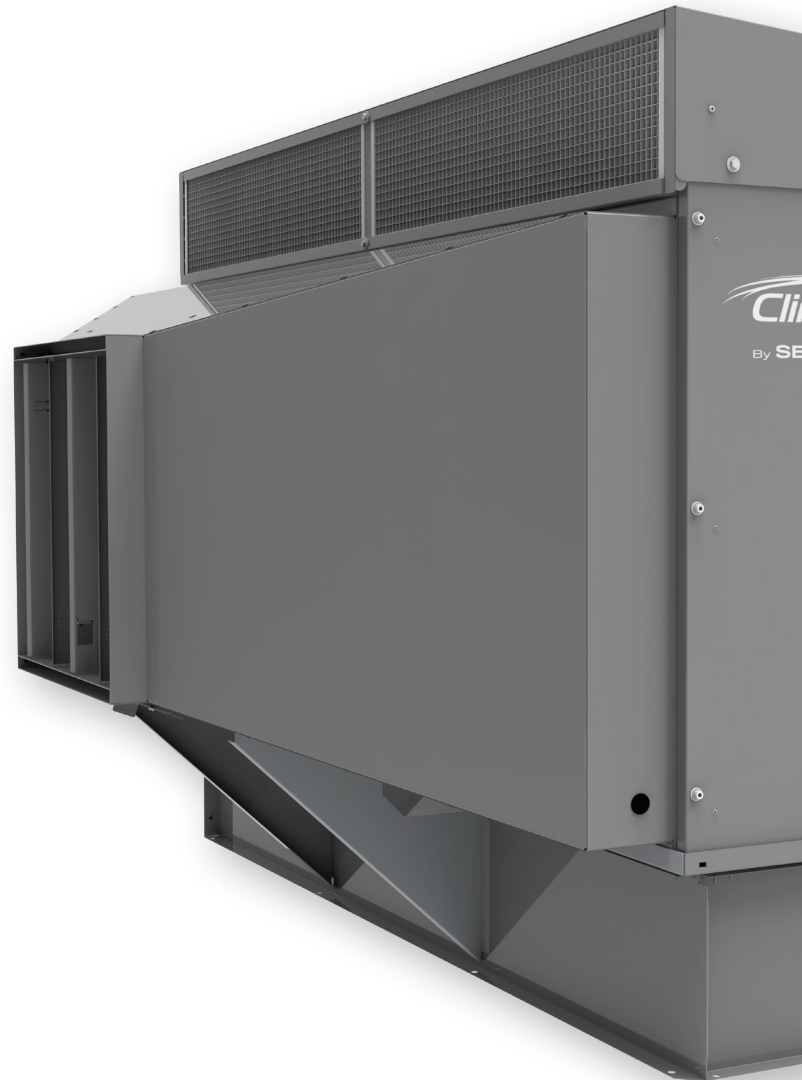

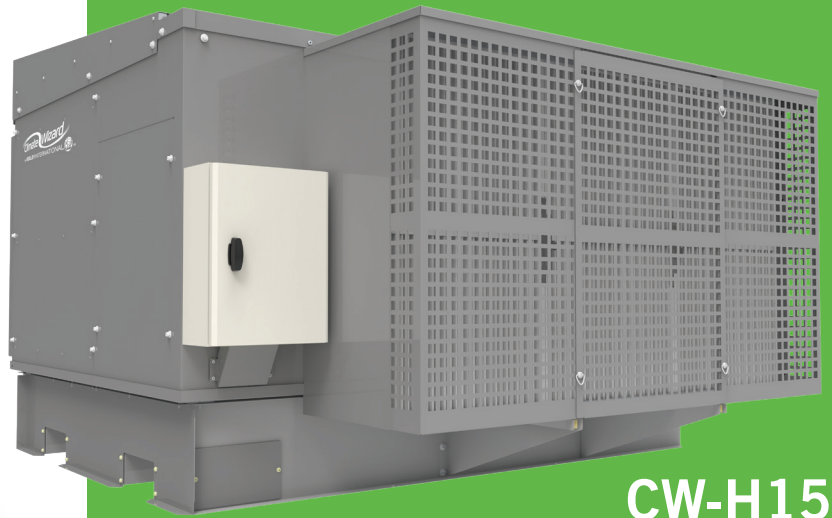

CW-H15

Latest advanced technology

CW-H15 has been upgraded with the latest state-of-the-art technology, including:


Increased outside air intake

The filter cowling has been upgraded to improve rigidity and strength while also allowing for quick and simple servicing.

Air intake efficiency has improved by increasing the air openings of the cowling. The filter cowling comes factory assembled to reduce installation requirements on site.

Upgraded filter design

The filters have been designed to increase surface area for reduced pressure drop and are arranged in a flat panel layout which improves access and servicing.

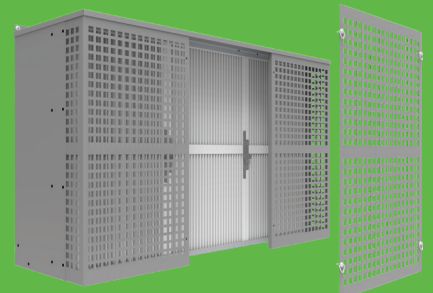


Schneider PLC and Schneider controller

The CW-H15 introduces the cutting-edge Schneider PLC with temperature and humidity sensor. Remotely access via webserver or control locally on the 4" colour touch screen display. Compatible with indirect/direct "supercool" range.

Black Opal™ Mini-Cell^ Chillcel® pads

Our revolutionary Black Opal™ Mini-Cell^ Chillcel® pads have transformed the aesthetics of our coolers as they seamlessly blend into their surroundings; maintaining our global leading Mini-cell^ Chillcel® pad technology, which increases surface area of the pads by 25%, dramatically multiplying cooling capacity and efficiency – **BEYOND BELIEF!**

^Patent pending

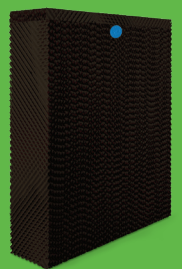

Cabinetry

- Powder coated, marine grade aluminium
- Weather proof and corrosion resistant
- Mechanical fasteners are stainless steel or aluminium

PLC and electronic control module


- Advanced electronics programmed for maximum efficiency
- Controls unit operation to minimise water consumption and maximise efficiency
- Can be configured to accept external BMS system inputs to control system operation (while retaining control of water management and system efficiency)
- Smart, reliable, durable



The Climate Wizard Supercool


CW-H15S, CW-H15S Plus and CW-80S models available

With The Climate Wizard Supercool, the moisture content can be fine-tuned to specifications, required for different applications, from data centres to wineries.

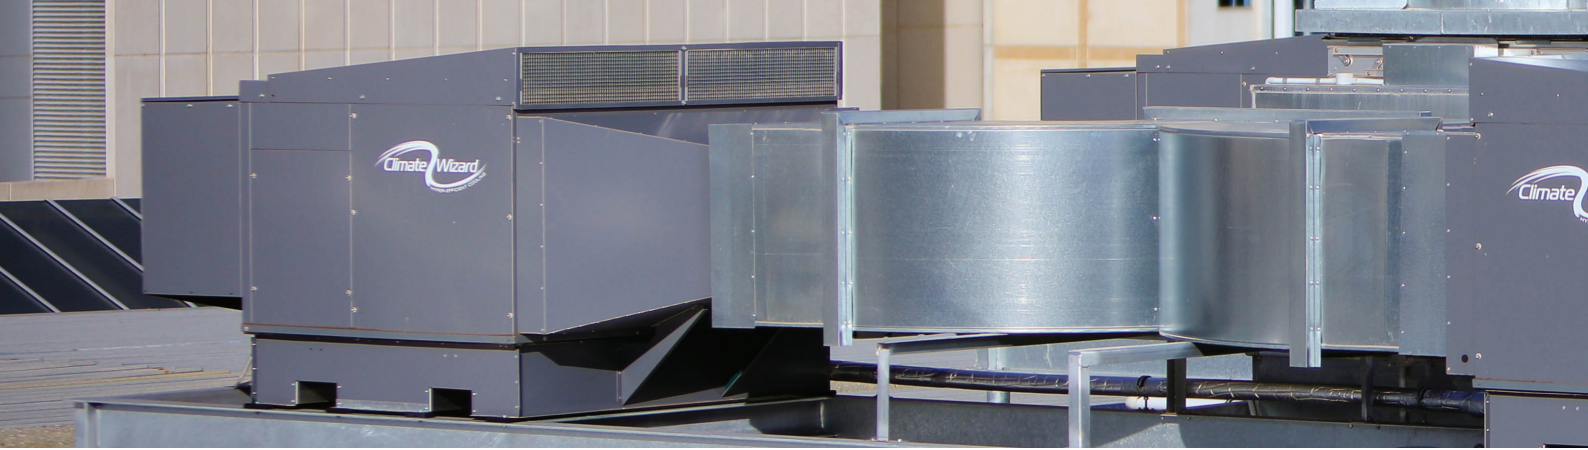

Performance comparison

The Climate Wizard vs refrigerated cooling as temperature rises

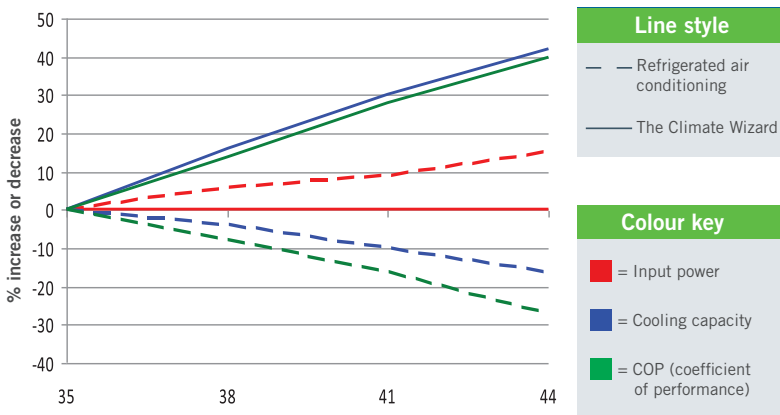

Outdoor Temperature (Degrees Celsius DB)
Source: Uni SA Roxby Downs Report June 2009

The Climate Wizard's cooling performance can rival that of refrigerated systems, using up to 80% less energy.

That's not only great for reducing power bills; it's also great for the environment. And, no matter how hot it gets outside, The Climate Wizard uses the same amount of power and still delivers 100% fresh, cool air inside.

This is in direct contrast to refrigerated systems, which require increasing amounts of power as outside temperatures rise. The Climate Wizard's cost-saving capabilities actually increase, when the heat is at its highest.


At the same time, The Climate Wizard's performance also increases as temperatures rise – again, in complete contrast to refrigerated systems.

Psychrometric chart

Barometric pressure 101.3kPa

The coloured lines on the psychrometric chart compare The Climate Wizard's performance to that of a direct evaporative cooler on a hot day.

- Direct evaporative cooling
- The Climate Wizard indirect evaporative air conditioning
- The Climate Wizard Supercool indirect evaporative cooling with direct evaporative stage

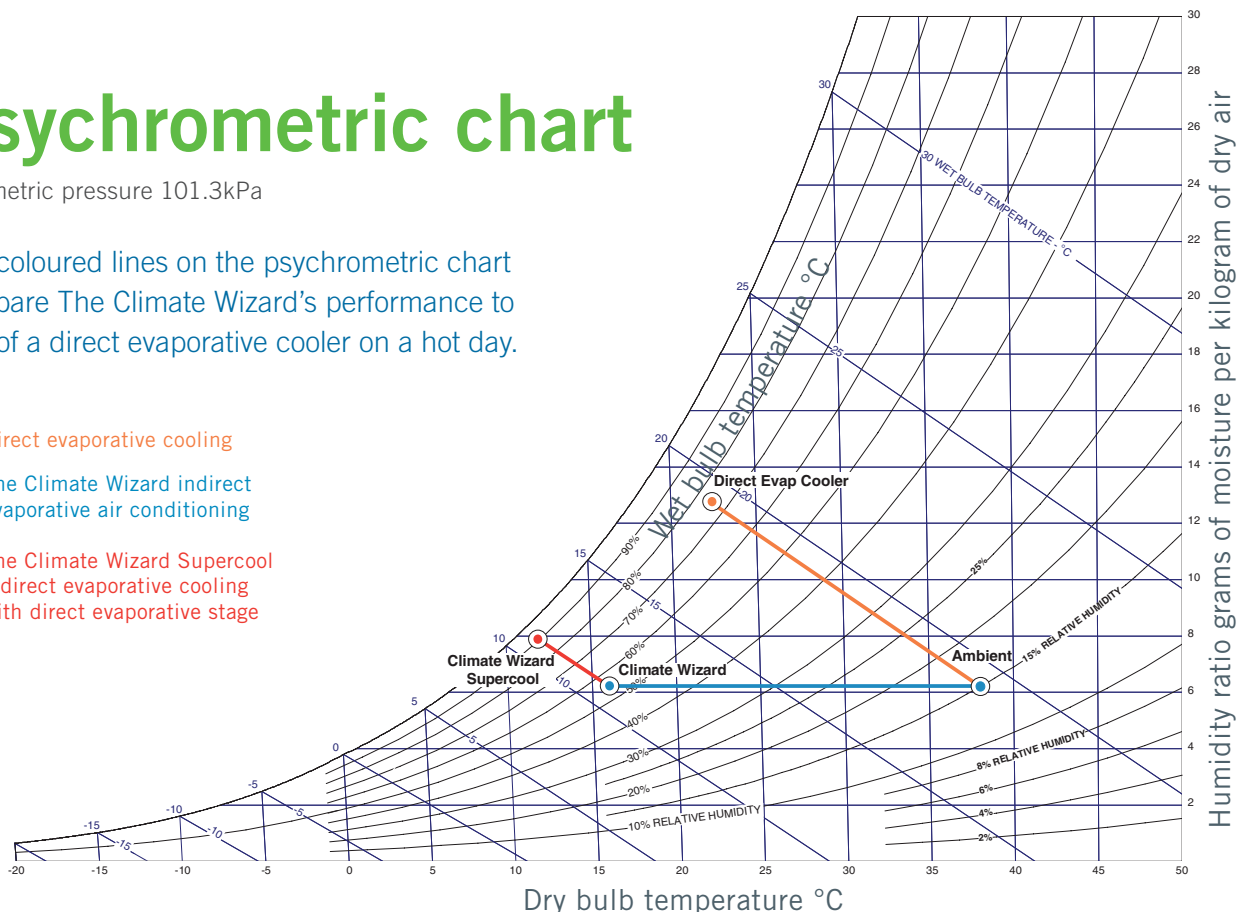



The Climate Wizard Cooling Performance

Supply Air Temperature

Location	Design Condition	The Climate Wizard Leaving Air Temp (°C)							
		CW-6S	CW-H15	CW-H15S	CW-H15S Plus	CW-80	CW-80S	CW-80 HiCap	CW-80S HiCap
Arid	42°C DB / 21°C WB	19	19	15	16	19	16	20	16
Temperate	37°C DB / 19°C WB	18	17	14	15	18	15	18	15
Continental	31°C DB / 20°C WB	20	19	17	18	20	18	20	18
Sub-Tropical	31°C DB / 23°C WB	23	22	21	21	23	21	23	22
Tropical	33°C DB / 26°C WB	26	25	24	25	26	25	26	25

Stand-Alone Cooling Capacity

Location	Design Condition	CW-6S		CW-H15		CW-H15S		CW-H15S Plus		CW-80		CW-80S		CW-80 HiCap		CW-80S HiCap	
		kW	COP	kW	COP	kW	COP	kW	COP	kW	COP	kW	COP	kW	COP	kW	COP
Arid	42°C DB / 21°C WB	12	7	12	7	17	9	22	10	74	6	100	8	82	6	114	8
Temperate	37°C DB / 19°C WB	15	8	14	8	19	10	25	11	88	7	112	9	97	7	128	9
Continental	31°C DB / 20°C WB	13	7	11	6	14	8	19	9	72	6	86	7	78	6	98	7
Sub-Tropical	31°C DB / 23°C WB	8	4	7	4	9	5	12	5	42	3	52	4	44	3	58	4

Pre-Cooling Capacity

Location	Design Condition	CW-H15		CW-H15S		CW-H15S Plus		CW-80		CW-80S		CW-80 HiCap		CW-80S HiCap	
		kW	COP	kW	COP	kW	COP	kW	COP	kW	COP	kW	COP	kW	COP
Arid	42°C DB / 21°C WB	31	17	36	20	50	23	207	17	228	18	234	16	261	18
Temperate	37°C DB / 19°C WB	27	15	32	18	43	20	175	14	196	16	198	14	225	16
Continental	31°C DB / 20°C WB	16	9	19	11	26	12	104	8	117	9	116	8	134	9
Sub-Tropical	31°C DB / 23°C WB	12	7	13	7	19	9	75	6	83	7	82	6	95	7
Tropical	33°C DB / 26°C WB	10	6	12	6	16	7	66	5	72	6	71	5	82	6

The Climate Wizard cooling performance calculator

Enter the key parameters to compare how much energy can be saved. Typically the results are compelling.

You will be provided with a summary and a report of your results to meet local climate conditions.

Go to seeleyinternational.com/commercial/tools



Controller options

BMS interface

Standard on all models

All The Climate Wizard air conditioning models are supplied with an interface to enable the cooler to be controlled from an external location, using a Building Management System.

BACnet

Standard on all CW-H and CW-80 models

Building Automation and Control Network communication protocol is available on all CW-H and CW-80 models.

Multi-Magic® PLC touch screen controller

Optional with CW-H15 range and CW-80 range

- 4" colour touch screen display with temperature and humidity sensor.
- Compatible with Indirect / Direct "Supercool" range
- 7 day programmable timer, 4 events per day
- Service screen with operational history for ease of troubleshooting and servicing
- Operate up to 15 coolers from one control



Schneider PLC

Standard with CW-H15 range and CW-80 range

- PLC screen and interface for local control and functionality
- Low level BMS interface – volt free contacts
- High level BMS interface - Modbus compatible
- 24Vdc power supply available



MagIQtouch® controller (Modbus capable)

Optional with CW-6S

- Easy operating process due to in-built Installation Wizard
- Each cooler comes supplied with 20m wiring loom (extendable to maximum 40m)
- Operate up to 60 coolers (total loom length must be 500m from a single MagIQtouch controller, using optional Link Module and wiring loom - no special controllers required)
- Operate Braemar ducted gas heating and The Climate Wizard cooling from the same MagIQtouch controller



MagIQtouch® BMS Industrial Controller MS1

Optional with CW-6S

- Optional 12Vdc power supply
- 100m communication cable
- Operate up to 60 coolers using link modules



Technical specifications

		The Climate Wizard
		CW-H15
Nominal cooling capacity*	25 kW	
Rated airflow	1,100 L/s (3,960 m ³ /h) at 150 Pa external static pressure	
Max. external static pressure	215 Pa	
Max. inlet air temperature	55 °C	
Power requirement	1.8 kW	
Electrical supply	3-phase, 380-415 V, 50 Hz	
Water supply	20 L/min delivered at 100 kPa min, 800 kPa max (External in-line filtration recommended)	
Water consumption	56 L/h	
Supply air configuration	Side discharge	
Supply fans	Backward curved centrifugal fan with direct coupled EC motor	
Exhaust fans	n/a	
Pump	Water circulation pump	
Water management	Low voltage catalytic chlorinator and salinity probe	
Drain valve	Low voltage, vertical, electric drive	
Heat exchanger core	3 x The Climate Wizard patented counter-flow heat exchanger cores	
Air filtration	G4 pleated washable filters with metal frames	
Water reservoir	One piece, moulded polymer, 65 L	
Dimensions	2,290mm (L) x 1,825mm (W) x 1,285mm (H)	
Shipping weight	320 kg	
Operating weight	325 kg	
Controller options	Wall controller, BMS interface, Modbus	

Note: specifications subject to change. *Tested in accordance with ASHRAE 143 conditions of 38.0 °C db / 21.0 °C wb. Stand alone cooling capacity may be lower, depending on application.

Technical specifications

	The Climate Wizard	
	CW-80	CW-80 Hi Cap
Nominal cooling capacity*	160 kW**	180 kW**
Rated airflow	7,400 L/s (26,640 m ³ /h) at 190 Pa external static pressure	8,500 L/s (30,600 m ³ /h) at 270 Pa external static pressure
Max. external static pressure	610 Pa	820 Pa
Max. inlet air temperature	55 °C	55 °C
Power requirement	12.4 kW at rated airflow	14.2 kW at rated airflow
Electrical supply	3-phase, 380-415 V, 50 Hz	3-phase, 380-415 V, 50 Hz
Water supply	45 L/min delivered at 85 kPa min, 800 kPa max (External in-line filtration recommendation)	45 L/min delivered at 85 kPa min, 800 kPa max (External in-line filtration recommendation)
Water consumption	260 L/h	275 L/h
Supply air configuration	Side discharge	Side discharge
Supply fans	2 x backward curved centrifugal fan with direct coupled EC motor	2 x backward curved centrifugal fan with direct coupled EC motor
Exhaust fans	4 x backward curved centrifugal fan with direct coupled EC motor	4 x backward curved centrifugal fan with direct coupled EC motor
Pump	Water circulation pump	Water circulation pump
Water management	Low voltage catalytic chlorinator and salinity probe	Low voltage catalytic chlorinator and salinity probe
Drain valve	Low voltage, vertical, electric drive	Low voltage, vertical, electric drive
Heat exchanger core	16 x The Climate Wizard patented counter-flow heat exchanger cores	16 x The Climate Wizard patented counter-flow heat exchanger cores
Air filtration	16 x G4 pleated washable filters with metal frames size 625mm x 625mm x 45mm	16 x G4 pleated washable filters with metal frames size 625mm x 625mm x 45mm
Water reservoir	One piece, moulded polymer, 180 L	One piece, moulded polymer, 180 L
Dimensions	3,980mm (L) x 2,550mm (W) x 3,515mm (H)	3,980mm (L) x 2,550mm (W) x 3,515mm (H)
Shipping weight	2,000 kg	2,000 kg
Operating weight	2,700 kg	2,700 kg
Controller options	Wall controller, BMS interface, Modbus	Wall controller, BMS interface, Modbus

Note: specifications subject to change. *Tested in accordance with ASHRAE 143 conditions of 38.0 °C db / 21.0 °C wb. Stand alone cooling capacity may be lower, depending on application. **Temperature data from field measurements.

Technical specifications

The Climate Wizard Supercool

CW-6S	CW-H15S	CW-H15S Plus	CW-80S	CW-80S HiCap
13 kW	33 kW	40 kW	186 kW**	214 kW**
1,300 L/s (4,680 m³/h) at 150 Pa external static pressure	1,100 L/s (3,960 m³/h) at 140 Pa external static pressure	1,600 L/s (5,760 m³/h) at 80 Pa external static pressure	7,100 L/s (23,040 m³/h) at 180 Pa external static pressure	8,200 L/s (23,040 m³/h) at 240 Pa external static pressure
250 Pa	195 Pa	155 Pa	580 Pa	825 Pa
50 °C	55 °C	55 °C	55 °C	55 °C
1.8 kW	1.8 kW	2.1 kW	12.4 kW at rated airflow	14.2 kW at rated airflow
1-phase, 220-240 V, 50/60 Hz	3-phase, 380-415 V, 50 Hz	3-phase, 380-415 V, 50 Hz	3-phase, 380-415V, 50 Hz	3-phase, 380-415V, 50 Hz
20 L/min delivered at 100 kPa min, 800 kPa max (External in-line filtration recommended)	20 L/min delivered at 100 kPa min, 800 kPa max (External in-line filtration recommended)	20 L/min delivered at 100 kPa min, 800 kPa max (External in-line filtration recommended)	45 L/min delivered at 85 kPa min, 800 kPa max (External in-line filtration recommendation)	45 L/min delivered at 85 kPa min, 800 kPa max (External in-line filtration recommendation)
60 L/h	60 L/h	72 L/h	295 L/h	335 L/h
Down discharge	Side discharge	Side discharge	Side discharge	Side discharge
1x 400mm Axial forward curved fan directly coupled with inverter motor	Backward curved centrifugal fan with direct coupled EC motor	Backward curved centrifugal fan with direct coupled EC motor	2 x backward curved centrifugal fan with direct coupled EC motor	2 x backward curved centrifugal fan with direct coupled EC motor
Backward curved centrifugal fan with direct coupled Inverter motor	n/a	n/a	4 x backward curved centrifugal fan with direct coupled EC motor	4 x backward curved centrifugal fan with direct coupled EC motor
Water circulation pump	Water circulation pump	Water circulation pump	Water circulation pump	Water circulation pump
Low voltage catalytic chlorinator and salinity probe	Low voltage catalytic chlorinator and salinity probe	Low voltage catalytic chlorinator and salinity probe	Low voltage catalytic chlorinator and salinity probe	Low voltage catalytic chlorinator and salinity probe
Low voltage, vertical, electric drive	Low voltage, vertical, electric drive	Low voltage, vertical, electric drive	Low voltage, vertical, electric drive	Low voltage, vertical, electric drive
8 x The Climate Wizard patented counter-flow Microcore heat exchanger cores	3 x The Climate Wizard patented counter-flow heat exchanger cores	3 x The Climate Wizard patented counter-flow heat exchanger cores	16 x The Climate Wizard patented counter-flow heat exchanger cores	16 x The Climate Wizard patented counter-flow heat exchanger cores
8 x Type G4 Std Cartridge Aluminium Washable 635 x 356 x 25mm	6 x G4 pleated washable filters with metal frames 457 x 508 x 50mm	6 x G4 pleated washable filters with metal frames 457 x 508 x 50mm	16 x G4 pleated washable filters with metal frames 625 x 625 x 45mm	16 x G4 pleated washable filters with metal frames 625 x 625 x 45mm
One piece, moulded polymer, 30L	One piece, moulded polymer, 65 L	One piece, moulded polymer, 65 L	One piece, moulded polymer, 180 L	One piece, moulded polymer, 180 L
1160mm (L) x 1160mm (W) x 1020mm (H)	2,290mm (L) x 1,825mm (W) x 1,285mm (H)	2,290mm (L) x 1,825mm (W) x 1,285mm (H)	3,980mm (L) x 2,550mm (W) x 3,515mm (H)	3,980mm (L) x 2,550mm (W) x 3,515mm (H)
175kg	355 kg	355 kg	2,100 kg	2,100 kg
210kg	340 kg	340 kg	2,850 kg	2,850 kg
BMS interface, MagIQtouch controller	Wall controller, BMS interface^, Modbus	Wall controller, BMS interface^, Modbus	Wall controller, BMS interface, Modbus	Wall controller, BMS interface, Modbus

Note: specifications subject to change. *Tested in accordance with ASHRAE 143 conditions of 38.0 °C db / 21.0 °C wb. Stand alone cooling capacity may be lower, depending on application. ^CW-H15 Supercool and Supercool Plus requires additional supercool section to be externally controlled by installing contractor. **Temperature data from field measurements.



BREEZAIR

Ducted Evaporative Air Conditioning

BRAEMAR

Ducted Evaporative Air Conditioning | Ducted Gas Heating
Reverse Cycle Air Conditioning | Gas Wall Furnaces and Space Heaters

THE CLIMATE WIZARD

Indirect Evaporative Air Conditioning

COOLAIR

Ducted Evaporative Air Conditioning

COOLERADO

Indirect Evaporative Air Conditioning

AIRA

Direct Evaporative Air Conditioning | Ducted Gas Heating
Commercial Gas Space Heating

seeleyinternational.com
1300 475 091
commercial@seeleyinternational.com

Seeley International Pty Ltd
ABN 23 054 687 035

112 O'Sullivan Beach Road, Lonsdale, SA 5160
Phone: (08) 8328 3850 Fax: (08) 8328 3950

Email: commercial@seeleyinternational.com
www.seeleyinternational.com

Information in this brochure was correct at the time of preparation.
Specifications subject to change without any notice. E & OE



FS 605002

Cat No CW005 REV Q (0822)