



INSTALLATION AND OWNER MANUAL MaglQtouch WIRELESS Smart Controller





Original English Instructions

TABLE OF CONTENTS

SAFETY		
Responsibilities	1	
Risk Assessment	1	
Warnings	1	
FCC Compliance	2	
MOUNTING THE MAGIQTOUC WIRELESS CONTROLLER	н	
Location	3	
Mounting the Controller	4	
MOUNTING THE MAGIQTOUCH		
WIRELESS RECEIVER	7	
Heater Installation	7	
Heater With Zones	8	
Cooler Installation	9	
Mounting the Receiver	9	
COMMISSIONING		
Connecting the Receiver	11	
Pairing	11	
Pairing Additional Controller	13	

15
18
19
20
23
25
27
27
28
29
30
33
35

KIT CONTENTS

MaglQtouch Wireless Smart Controller

Item	Qty	Description
А	1	MaglQtouch Wireless Smart Controller
В	1	MaglQtouch Wireless Receiver
С	4	AA Batteries
D	1	Install & Operation Manual
Е	2	Screw PAN PHIL 6AB*1" ZP
F	2	Wall Plug Yellow (¼") 5mm



Item C



Item D



SAFETY

This document provides technical guidance on the installation and operation of the MaglQtouch WI-FI smart app.

EMPLOYER AND EMPLOYEE RESPONSIBILITIES

Please read this manual carefully. Your failure to do so could result in injury to you or damage to the cooler and property.

The installation and maintenance of evaporative coolers at height has the potential to create Occupational Health and Safety issues for those involved. Installers are advised to ensure they are familiar with Local Acts, Regulations and Standards, which may offer practical guidance on health and safety issues.

Compliance with these regulations will require appropriate work practices, equipment, training and qualifications of workers.

INSTALLER AND MAINTENANCE CONTRACTORS- RISK ASSESSMENT

Seeley International provides the following information as a guide to contractors and employees to assist in minimising risk whilst working at height.

A risk assessment of all hazardous tasks is required under legislation. A risk assessment is an essential element that should be conducted before the commencement of work, to identify and eliminate the risk of falls or to minimise these risks by implementing control measures. There is no need for this to be a complicated process, it just is a matter of looking at the job to be done and considering what action(s) are necessary so the person doing the job does not injure themselves.

This should be considered in terms of:

- What are the chances of an incident happening?
- What could the possible consequence be?
- What can you do to reduce, or better still, completely get rid of the risk?

WARNINGS!

The MagIQtouch Wireless Smart Controller and Receiver are to be installed indoors only, installation shall only be performed by suitably trained and qualified personnel, in accordance with local and national wiring rules.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance. If any cables are damaged, they shall be replaced by the manufacturer or its service agent or similarly qualified person in order to avoid a hazard.

Stranded conductors shall not be consolidated by lead-tin soldering where they are subject to contact pressure, i.e. on terminal block.

1 | MAGI@TOUCH

SAFETY

FCC COMPLIANCE

Supplier's Declaration of Conformity 47 CFR § 2.1077 Compliance Information		
	Wall Controller, Product Number 117911, FCC ID R2ESIA18 Receiver, Product Number 902869, FCC ID R2ESIA19	
	– U.S. Contact Information Seeley International (Americas) 1002 South 56th Ave, Suite 101, Phoenix, ARIZONA 85043	
two conditions: (1)	statement s with Part 15 of the FCC Rules. Operation is subject to the following This device may not cause harmful interference, and (2) this device must nee received, including interference that may cause undesired	

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device. pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

MOUNTING THE MAGIQTOUCH WIRELESS SMART CONTROLLER

LOCATION

The MaglQtouch Wireless Smart Controller should be placed approximately 1.5 metres (5') above the floor, in the most used room of the home.

Placement is critical for correct functioning of the temperature sensing thermostat inside the Controller.

The following must be taken into consideration:

- · Avoid direct sunlight exposure.
- · Avoid mounting on external walls.
- Avoid mounting the wall control near heat sources such as stoves and televisions.
- · Do not locate in the direct airflow of the duct outlets.
- Do not locate in strong drafts or in dead spots such as cupboards / drawers.


CAUTION!

Always make sure there are no electrical cables, gas or water pipes, or the like, behind where you intend to drill.

MOUNTING THE MAGIQTOUCH WIRELESS SMART CONTROLLER

MOUNTING THE CONTROLLER

Remove the mounting bracket from the rear of the MaglQtouch Controller.

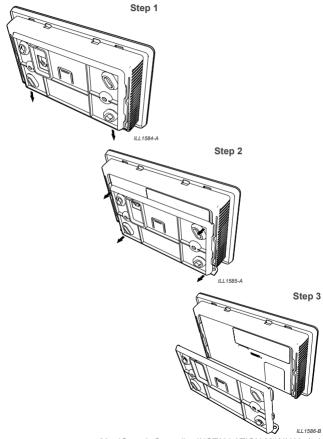


MagIQtouch Controller INSTALLATION MANUAL | 4

MOUNTING THE MAGIQTOUCH WIRELESS SMART CONTROLLER

Step 4


Using the bracket as a template, mark the centre points for the screw and cable access holes.



MOUNTING THE MAGIQTOUCH WIRELESS SMART CONTROLLER

Step 5

Insert wall plugs into holes. Align and screw the bracket into position using the supplied screws.



ILL2938-A

Alternatively, a standard stud mounting bracket (used for wall plates) can be used with plasterboard walls.

MOUNTING THE MAGIQTOUCH WIRELESS RECEIVER


We recommend installation of the wireless receiver (Antenna) inside the ceiling / floor space space, as far away from heating / cooling appliances and ductwork as possible and also as close as practical to the area of the building the remote controller will be used the most. Therefore, we request that the antenna is always straightened and pointing towards the remote.

IMPORTANT!


The wireless receiver is not designed to be installed outdoors!

Do not wrap any excess wireless receiver cable around the receiver. Do not extend the receiver cable.


HEATER INSTALLATION



MOUNTING THE MAGIQTOUCH WIRELESS RECEIVER HEATER WITH ZONES - INSTALLATION




MOUNTING THE MAGIOTOUCH WIRELESS RECEIVER COOLER INSTALLATION



MOUNTING THE WIRELESS RECEIVER


For most installations, mounting the receiver as shown (Fig 1) will provide satisfactory performance.



- metal roof)
- 9 | MAGI@TOUCH

MOUNTING THE MAGIQTOUCH WIRELESS RECEIVER

For installations where the roof is framed with steel, resting the wireless receiver between joists and keeping the antenna as far away as possible and perpendicular (at right angles) to joists will give the best results. (Fig. 3)

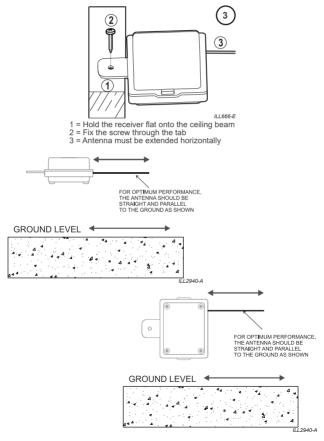

- · Factors that may influence performance are:
- Shielding from metal in the attic laying between the wireless receiver and the wireless smart controller.
- · Reflections from metal around the wireless receiver.
- Interference from nearby transmitters (e.g. mobile phone, AM radio, Television, RF security systems)


CONNECTING THE WIRELESS RECEIVER

Please refer to the installation manual of the heating or cooling appliances for connecting the 6 pin communication plug from the wireless receiver. Some manuals may refer to a 'wired' wall control configuration. However, the wireless receiver can be connected in place of the wall control connection shown in the schematic diagrams.

PAIRING

Step 1

Fit the 4x AA batteries supplied with the Wireless Smart controller.



NOTE:

Rechargeable batteries should not be used.

Only good quality Alkaline or Lithium AA batteries to be used.

ILL2856-A


Step 2

Cycle the power to the installation.

11 | MAGI@TOUCH


Step 3

Within 8 minutes of cycling the power, press the home button on the Wireless Smart Controller to activate it.



Step 4

Follow the on screen instructions to pair the wall control.



Step 5

When the Wireless wall controller is paired the installation wizard will appear. The Installation wizard will step you through the complete process.

÷	SYSTEM INSTALLATION WIZARD System Definition What am I installing?	
HEATING		
COOLING		•
	CONT.	ILL 1610-

To complete the commissioning please refer to the 'MaglQtouch Controller - Installation manual supplied with this kit.


PAIRING ADDITIONAL WIRELESS CONTROLLER

The wireless receiver can communicate with 2x Wireless Smart Controllers within the system. During normal operation whichever wall controller is used last will take control of the system.

To pair an additional Wireless Smart Controller commence with the following steps.

Step 1

Fit the 4x AA batteries supplied with the Wireless Smart controller.



NOTE:

Rechargeable batteries should not be used.

Only good quality Alkaline or Lithium AA batteries to be used.

Step 2

Cycle the power to the installation. This will make the Wireless receiver discoverable for a maxmium of 8_minutes to the Wireless smart controller.

Step 3

Select 'Additional Controller' to pair the second Wireless controller.





The additional wireless smart controller is now ready to use.

Should the wireless communications require updates or modifications in the system, these can be accessed in the SERVICE section of the Wireless Smart controllers as follows;

Step 1



Step 2




Step 3



Step 4 Refer to MaglQtouch Wall control install manual for code.





ABOUT WIRELESS RECEIVER

Detailed RF signal strength (RSSI) and battery voltage (mV) information is displayed here.

CHECK / MODIFY WIRELESS CONFIGURATION

All known Wireless smart devices connected to the system will be shown. If devices are missing the wireless receiver can re-scan for wireless devices from this configuration screen to maintain the system.

RESET / REMOVE THIS CONTROLLER FROM THE SYSTEM

This option will safely remove a Wireless Smart controller from the system.

WIRELESS RECEIVER REPLACED

In the unlikely event the wireless receiver has to be replaced in the system, this option will load system configuration stored in the wireless smart controller to the new wireless receiver.

WIRELESS RF SIGNAL RANGE

It is recommended to check the RF range of the wireless smart controller during commissioning to know the best positions / environments to maintain normal operation of the system & controller.

To check signal strength or range of the wireless smart controller it can be accessed as follows;

Step 1







Step 3



It is possible to reset the whole system (including all connected components) or the MaglQtouch Controller only.

Use a pin or paperclip to press and hold the reset button located at the back



III 1596.C

This will cause the following screen to appear:



Note! RESET WALL CONTROLLER ONLY

This option should only be selected if the wall controller connected was previously used in another installation.

RESET WHOLE SYSTEM

Resetting the whole system will set all components connected to the wall controller to default factory settings. When a system is reset it will be required to go through 'System Installation Wizard' again from the start, including pairing with the wireless wall controller to the wireless receiver.

19 | MAGI@TOUCH

SYSTEM RESET WHEN 2X WIRELESS WALL CONTROLLERS ARE CONNECTED

Recommended sequence to reset the whole system when 2x wireless wall controllers are installed.



Step 1 Go to 1x "active" wireless wall controller





Step 3



MaglQtouch Controller INSTALLATION MANUAL | 20

SYSTEM RESET WHEN 2X WIRELESS WALL CONTROLLERS ARE CONNECTED

Step 4



Step 5

When the screen shot below is displayed, go to the 2nd wireless wall controller



Step 6

Activate the 2nd wireless wall controller



ILL2879-A

SYSTEM RESET WHEN 2X WIRELESS WALL CONTROLLERS ARE CONNECTED

Step 7



Step 8



Step 9

Pair controller and the Installation Wizard will begin.



MagIQtouch Controller INSTALLATION MANUAL | 22

SUPPORT

Symptom	Cause	Action
The MaglQtouch Wireless Smart	Batteries not fitted	Remove battery cover and fit 4x AA batteries
Controller has no display	Batteries not fitted correctly	Ensure batteries are orientated as shown inside battery cavity
	Batterries are low	Replace 4x AA batteries
	Controller in sleep mode	Press the Home button to the right of the screen
The MagItouch Wireless Smart	Wireless Smart Controller out of range	Check RF signal in 'SETTINGS'. Move controller closer to Wireless receiver.
Controller states 'This Controller has lost Communication!'	Appliance connected to Wireless receiver is switched off	Check power to the installation.
	Batteries in controller are low	Replace 4x AA batteries
The MaglQtouch Wireless wall controller will not pair	Installation has been powered up for longer than 8 minutes after 'Pair' is pressed on controller	Cycle the power to the installation to initiate the 8 minute 'discovery mode' on the wireless receiver and press 'PAIR' on wireless smart controller
	The Wireless receiver is not connected	Ensure the Wireless is connected and installed correctly in the installation circuit
	2x MaglQtouch Wireless controllers are already paired	Remove 1x Wireless controller from 'SERVICE' screen. Only a maximum of 2x wireless Smart controllers can be paired
	20m (66') communications cable supplied with kit is broken or damaged	Replace cable
	Wireless Smart Controller out of range to Wireless receiver	Move wireless receiver and Wireless Smart controller closer together.
The Installation wizard states 'No appliances found'	The wireless smart controller has been paired but the installation has been started after the initial 4 minutes of cycling the power	Cycle the power to the installation and press 'RETRY' on the wireless controller

SUPPORT

Symptom	Cause	Action
The screen on the Wireless Smart Controller goes blank after a while	The Smart controller conserves the battery life by putting the controller in a sleep mode	Press Home Button
The screen on the wireless Smart controller goes blank but the system still operates	The Smart controller conserves the battery life by putting the controller in a sleep mode	To check the status of the system press the 'HOME' button to the right of the Wireless smart controller to see the current running condition of the system
The additional Wireless Smart Controller does not allow me to adjust anything	The additional Wireless controller will display the operating condition of system	Press 'ACTIVATE' on wireless Smart Controller
Not achieving set temperature	The temperature is sensed at the controller. Check the location of the controller.	 Avoid direct sunlight exposure Avoid sitting wall control near heat sources such as stoves and televisions. Do not locate in direct airflow of the duct outlets. Do not locate in strong drafts or in dead spots such as cupboards or drawers.

USER GUIDE

25 | MAGI@TOUCH

USER GUIDE



Hello and congratulations on purchasing

a MaglQtouch Wireless Smart Controller for your home!

The MaglQtouch Wireless Smart Controller is a versatile and intelligent Controller that can be used with a range of compatible products.

This manual is a supplement to the MaglQtouch Controller Owners Manual supplied with this Wireless controller. For more information about operating the MaglQtouch Wireless Smart Controller, please refer to the other Owners Manual supplied.




GENERAL TIPS

- Mount the MagIQtouch Wireless Smart Controller in a room you want climate controlled. Ideally it should be positioned 1.5m (5') from the floor and away from any other heating or cooling sources.
- Ensure the MadIQtouch Wireless Smart Controller is not exposed to direct sunlight as this will impact the temperature reading.
- Avoid blocking or restricting the vent holes located in the side of the MaglQtouch Controller, as this is where the thermostat is located.
- Do not use harsh chemical cleaners to clean the touch screen. For best results use distilled water or a touchscreen specific cleaning agent with a microfibre cloth

REPLACING THE BATTERIES

Batteries are fitted to back of the controller as shown



Rechargeable batteries should not be used.

Only good quality Alkaline or Lithium AA hatteries to be

II I 2856-A

Replace batteries when this message is displayed




27 | MAG @TOUCH

QUICK START

Here's a brief visual guide to get you started quickly! Turning on the MaglQtouch Wireless Smart Controller.

STEP 1

Activate screen.






SLEEP MODE

If the Wireless controller is not touched for a period of time, it will go to a sleep mode where the screen will go blank.


Simply push the "home" button to view the display.



ILL2875-A

WIRELESS RANGE

It is recommended for optimum performance to operate your Wireless Smart Controller within 30m (100') of the appliance.



WIRELESS RANGE

To check the signal strength of your Wireless Smart Controller, follow these steps.

Step 1

Press "SETTINGS"




Step 2

Press "RF SIGNAL STRENGTH"



Step 3

RF Signal Strength display appears



ILL2761-B

WIRELESS RANGE

As you move the wireless controller around your home it will be quite normal for the RF signal strength to change.

If the wireless control is out of range the following message will be displayed.

PLEASE CHECK THE FOLLOWING:
- APPLIANCE IS ON
-CONTROLLER IS WITHIN RANGE
RETRY

ADDITIONAL WIRELESS SMART CONTROLLER

If you have an additional Wireless Smart Controller installed in your system both controllers have the same operation and features.

The last controller used is the active controller

Wireless Controller No. 1 "ACTIVE"



Wireless Controller No. 2 "INACTIVE"



ADDITIONAL WIRELESS SMART CONTROLLER

To activate an 'INACTIVE' wall control press 'ACTIVATE'



The "Activate" button is displayed on the Inactive controller.



TROUBLE SHOOTING

Your MaglQtouch Controller may prompt you to call a service agent to resolve a service issue. If your Controller has only recently been installed, we recommend you call your local Dealer for support first. Otherwise, call the Service number on the back of this manual.

Symptom	Cause	Action
The MaglQtouch Controller has no display.	Batteries not fitted	Remove battery cover and fit 4x AA batteries. NOTE: Rechargeable batteries should not be used. Only good quality Alkaline or Lithium AA batteries are recommended.
	Batteries not fitted correctly	Ensure batteries are orientated as shown inside battery cavity
	Controller in sleep mode	Press the Home button to the right of the screen
The MagItouch Wireless Smart Controller states ' This Controller has lost Communication!'	Wireless Smart Controller out of range	Check RF signal in 'SETTINGS'. Move controller closer to Wireless receiver.
	Appliance connected to Wireless receiver is switched off	Check power to installation.
	Batteries in controller are low	Replace 4x AA batteries
The screen on the wireless Smart controller goes blank but the system still operates.	The Smart controller conserves the battery life by putting the controller in a sleep mode.	To check the status of the system press the 'HOME' button to the right of the Wireless smart controller to see the current running condition of the system.
The additional Wireless Smart Controller does not allow me to adjust anything.	The additional Wireless controller will display the operating condition of system.	Press 'ACTIVATE' on Wireless Smart Controller.
Not achieving set temperature.	The temperature is sensed at the controller. Check the location of the controller.	 Avoid direct sunlight exposure Avoid sitting wall control near heat sources such as stoves and televisions. Do not locate in direct airflow of the duct outlets. Do not locate in strong drafts or in dead spots such as cupboards or drawers.



Warranty Service Australia 1-300-650-644

Technical Support Australia 1-300-650-399 For regions outside Australia: Contact your local Dealer

seeleyinternational.com

MANUFACTURED BY: SEELEY INTERNATIONAL PTY LTD 112 O'SULLIVAN BEACH RD, LONSDALE SA, 5160. AUSTRALIA

IMPORTED BY: SEELEY INTERNATIONAL (EUROPE) LTD 5 PAPPLEWICK LANE, HUCKNALL, NOTTINGHAM, NOTTINGHAMSHIRE, NG15 7TN, UNITED KINGDOM

> SEELEY INTERNATIONAL (AMERICAS) LTD 1002 S 56TH AVENUE, SUITE #101, PHOENIX, ARIZONA 85043, USA

SEELEY INTERNATIONAL (AFRICA) PTY LTD 6 WITTON ROAD, FOUNDERSVIEW SOUTH, MODDERFONTEIN 1609, GAUTENG, SOUTH AFRICA

It is the policy of Seeley International to introduce continual product improvement. Accordingly, specifications are subject to change without notice. Please consult with your dealer to confirm the specifications of the model selected.

MAGI@TOUCH ((5))

WIRELESS Next Generation Smart Controller

861794-F

seeleyinternational.com